

EYE 17

Reference: E17.XXXW.P8.XK.V.XXX

TECHNICAL SPECIFICATIONS

Characteristics

| | | | |
|-------------------|-----------------|--|--|
| Color Temperature | 5.000K 4.000K | | |
| Color Rendering | ≥ 70 Ra | | |
| Angle | 120° | | |
| LED Chip | OSRAM | | |

Electrical Specifications

| | | | |
|---|---|----------|----------|
| AC Input | 220-240VAC | | |
| Nominal Frequency | 50-60 Hz | | |
| Total Harmonic Distortion | < 5% (a 230V, 50Hz, nominal power) | | |
| Power Factor | >0.98 | | |
| Insulation Class | Class II | | |
| Operating Temperature | - 40°C ~ 60°C | | |
| Operating Humidity | 10% ~ 95% | | |
| Nominal Power (tol.5%) | 100W | 120W | 150W |
| LED Luminous Flux | 15.500lm | 18.600lm | 23.250lm |
| Output Flux (conversion and fixture losses included) | 13.000lm | 15.600lm | 19.500lm |
| Working Life LM80 | 100.000 h | | |
| Interface <i>Dimming</i> | Tridonic one4all (DALI, U6Me2, ready2mains) | | |

Mechanical and Material Specifications

| | | | |
|-------------|--|--|--|
| Dimension | 480 x 320 x 142 mm (C x L x A) | | |
| Net Weight | 8Kg | | |
| Housing | High Pressure Die Cast Aluminium | | |
| Top Coating | Water Based Zink Flake Corrosion Protection | | |
| Diffuser | Tempered glass | | |
| IP Class | IP65 | | |
| Colour | Grey (RAL 7001) with Customized Rim (transparent, grey or black) | | |
| Others | Sealed anti-condensation valve | | |




Warranty 5 Years

Made in EU






OSRAM
LED Technology included

TECHNICAL DRAWINGS AND ACCESSORIES

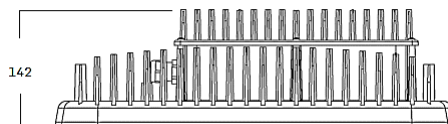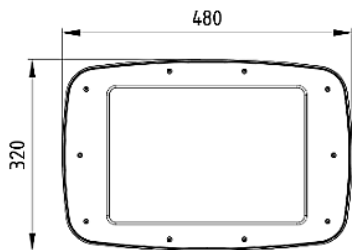

Fixing Accessory (included)

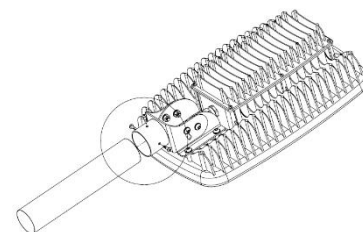

E17.XXXW.P8.XK.V.XXX

